


Two Speed Sill Skin Survey Form

Email completed form to: zach.busch@meiusa.com

JOB NAME _____ DATE _____

JOB ADDRESS _____

CONTACT NAME _____ EMAIL _____

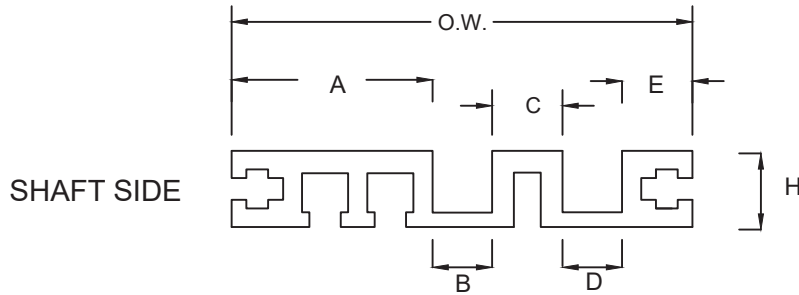

BUILDING/JOB SITE INFORMATION

PIT DEPTH: _____

CAB HEIGHT: _____

BASEMENT FLOOR:

☐ YES

☐ NO

AFTER HOURS INSTALL:

☐ YES

☐ NO

IS THE BUILDING UNDER CONSTRUCTION? (not including sill replacement)

☐ YES

☐ NO

CAR # _____

FLOOR # _____

A =

B =

C =

D =

E =

H =

O.W. =
 overall width

SILL LENGTH =

QTY =

SILL TYPE:

☐ ENTRANCE SILL

☐ CAB SILL

LOBBY SILLS:

☐ YES

☐ NO

QTY: _____

EXISTING SILL

CLEAR OPENING
 SIZE _____

☐ CENTER PARTING

☐ SIDE SLIDE

FINISH:

☐ ALUMINUM

☐ BRONZE

☐ CAST IRON

☐ NICKEL SILVER

☐ STAINLESS STEEL

NEW SILL SKIN

FINISH:

☐ BRONZE

☐ STAINLESS STEEL

It is best to measure the sills where there is the least amount of wear. For center parting doors, take measurements of the middle of the sill. For side parting doors, measure at the post.